

# KS SERIES\_KINGSPAN BREAK FORM TRIMS

CLICK TO VIEW



## REVISION

|   |          |
|---|----------|
| 1 | 12/19/23 |
| 2 | 11/25/24 |
| 3 | 9/18/26  |
|   |          |
|   |          |
|   |          |
|   |          |

|                    |                     |
|--------------------|---------------------|
| CI-DS-01-KSH-TRIMS | C AND I DISCLAIMER  |
| CI-BF-01-KSH-TRIMS | BASE FLASHING       |
| CI-BF-02-KSH-TRIMS | BASE FLASHING       |
| CI-BF-03-KSH-TRIMS | BASE FLASHING       |
| CI-BT-01-KSH-TRIMS | BASE TRIM           |
| CI-BT-02-KSH-TRIMS | BASE TRIM           |
| CI-SF-01-KSH-TRIMS | STACK FLASHING      |
| CI-OC-01-KSH-TRIMS | OUTSIDE CORNER TRIM |
| CI-OC-02-KSH-TRIMS | OUTSIDE CORNER TRIM |
| CI-OC-03-KSH-TRIMS | OUTSIDE CORNER TRIM |
| CI-IC-01-KSH-TRIMS | INSIDE CORNER TRIM  |
| CI-IC-02-KSH-TRIMS | INSIDE CORNER TRIM  |
| CI-DF-01-KSH-TRIMS | DRIP FLASHING       |
| CI-DF-02-KSH-TRIMS | DRIP FLASHING       |
| CI-CT-01-KSH-TRIMS | CAP TRIM            |
| CI-CT-02-KSH-TRIMS | CHANNEL TRIM        |
| CI-JT-01-KSH-TRIMS | JAMB TRIM           |
| CI-SL-01-KSH-TRIMS | SILL TRIM           |
| CI-PT-01-KSH-TRIMS | PARAPET CAP TRIM    |
| CI-PT-02-KSH-TRIMS | PARAPET LAP STRIP   |
| CI-PT-03-KSH-TRIMS | PARAPET CAP TRIM    |
| CI-PT-04-KSH-TRIMS | PARAPET LAP STRIP   |
| CI-CL-01-KSH-TRIMS | CLEAT TRIM          |
| CI-HT-01-KSH-TRIMS | HAT TRIM            |
| CI-HT-02-KSH-TRIMS | 2-PC HAT TRIM       |
| CI-MP-01-KSH-TRIMS | MENDING PLATE       |

INDEX SHEET

DETAIL #: CI-XX-XX-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

## DISCLAIMERS:

THESE DETAILS ARE PROVIDED AS A GUIDELINE FOR PROPER PANEL AND ASSOCIATED COMPONENT INSTALLATION, AND ARE BASED ON INDUSTRY ACCEPTED PRACTICES.

LOCATION OF VAPOR BARRIERS AND ASSOCIATED SEALANTS IN THESE DETAILS ARE BASED ON TYPICAL DESIGN PRACTICES FOR MOST U.S. CLIMACTIC ZONES. (THE PRIMARY VAPOR BARRIER IS PLACED ON THE "WARM" SIDE IN WINTER).

CONTACT KINGSPAN TECHNICAL SERVICES FOR SPECIFIC PROJECT FASTENING REQUIREMENTS

EXTRUSION SHAPES / ENGAGEMENT MAY VARY FROM THOSE SHOWN.

***PROJECTS LOCATED IN AREAS SUBJECT TO EXTREME COLD AND/OR HIGH SNOW LOADS MAY REQUIRE MODIFICATIONS TO THESE DETAILS - CONTACT KINGSPAN TECHNICAL SERVICES FOR SPECIFIC PROJECT RECOMMENDATIONS.***

***ALL STRUCTURAL SUPPORTS ARE NOT BY KINGSPAN AND ARE SHOWN FOR CLARIFICATION PURPOSES ONLY.***

PLEASE VISIT [HTTP://KINGSPANPANELS.US](http://kingspanpanels.us) or [HTTP://WWW.KINGSPANPANELS.CA](http://www.kingspanpanels.ca) TO ENSURE YOU ARE VIEWING THE MOST RECENT AND ACCURATE PRODUCT INFORMATION.

CARE HAS BEEN TAKEN TO ENSURE THAT THE CONTENTS OF THIS PUBLICATION ARE ACCURATE, BUT KINGSPAN AND ITS SUBSIDIARY COMPANIES DO NOT ACCEPT RESPONSIBILITY FOR ERRORS OR FOR INFORMATION THAT IS FOUND TO BE MISLEADING. SUGGESTIONS FOR, OR DESCRIPTION OF, THE END USE OR APPLICATION OF PRODUCTS OR METHODS OF WORKING ARE FOR INFORMATION ONLY AND KINGSPAN LIMITED AND ITS SUBSIDIARIES ACCEPT NO LIABILITY IN RESPECT THEREOF.

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 3          | 9/18/26 |

COMMERCIAL AND INDUSTRIAL  
DISCLAIMER

DETAIL #: CI-DS-01-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:


LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

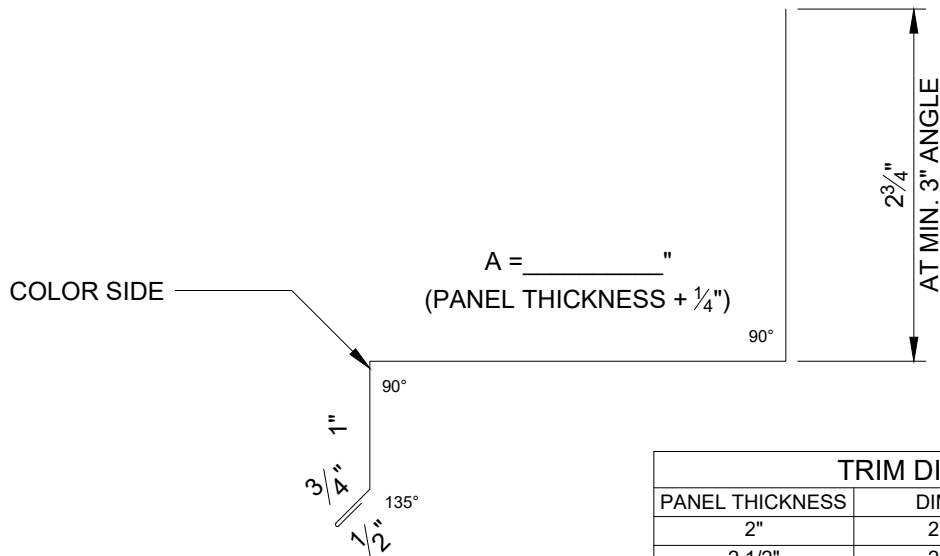

| TRIM DIMENSION  |          |             |
|-----------------|----------|-------------|
| PANEL THICKNESS | DIM. "A" | STRETCH OUT |
| 2"              | 2 1/4"   | 7 1/4"      |
| 2 1/2"          | 2 3/4"   | 7 3/4"      |
| 3"              | 3 1/4"   | 8 1/4"      |
| 4"              | 4 1/4"   | 9 1/4"      |
| 5"              | 5 1/4"   | 10 1/4"     |
| 6"              | 6 1/4"   | 11 1/4"     |
| 8"              | 8 1/4"   | 13 1/4"     |

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-BS-06-KSH CI-BS-CMU-05-KSH  
CI-VJ-13-KSH CI-VJ-22-KSH

\*\*IF PAINTED PLEASE SPECIFY WHICH SIDE\*\*

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

BASE FLASHING

DETAIL #: CI-BF-01-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

www.kingspanpanels.com



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:


LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

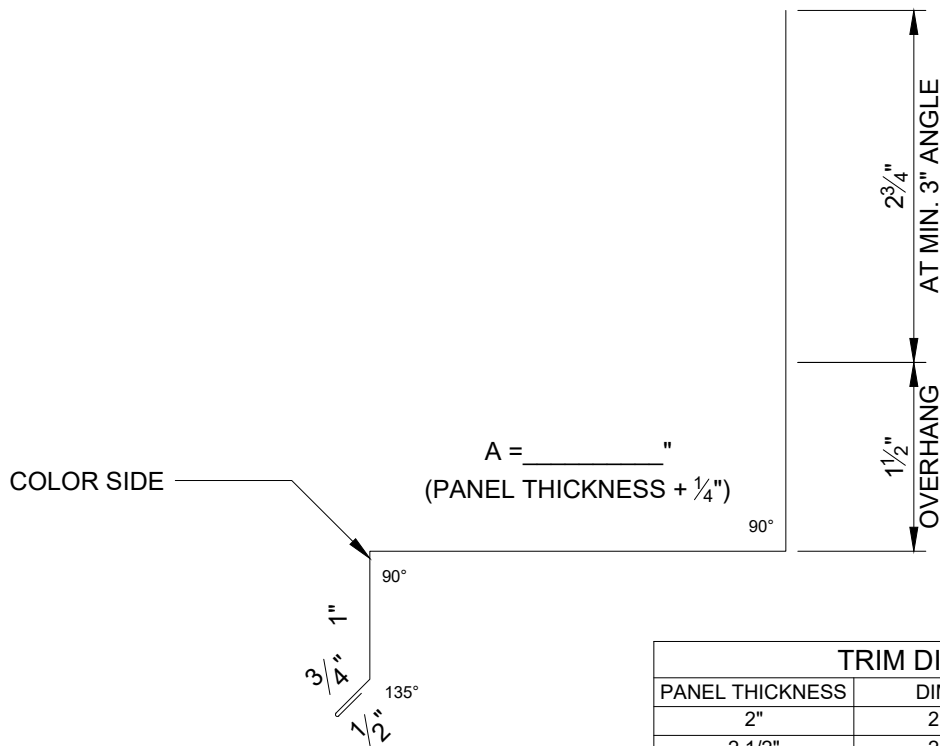

TRIM DIMENSION

| PANEL THICKNESS | DIM. "A" | STRETCH OUT |
|-----------------|----------|-------------|
| 2"              | 2 1/4"   | 8 3/4"      |
| 2 1/2"          | 2 3/4"   | 9 1/4"      |
| 3"              | 3 1/4"   | 9 3/4"      |
| 4"              | 4 1/4"   | 10 3/4"     |
| 5"              | 5 1/4"   | 11 3/4"     |
| 6"              | 6 1/4"   | 12 3/4"     |
| 8"              | 8 1/4"   | 14 3/4"     |

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-BS-06-KSH

CI-BS-CMU-05-KSH

\*\*IF PAINTED PLEASE SPECIFY WHICH SIDE\*\*

REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

BASE FLASHING

DETAIL #: CI-BF-02-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

www.kingspanpanels.com



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 6

QUANTITY REQUIRED:


LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

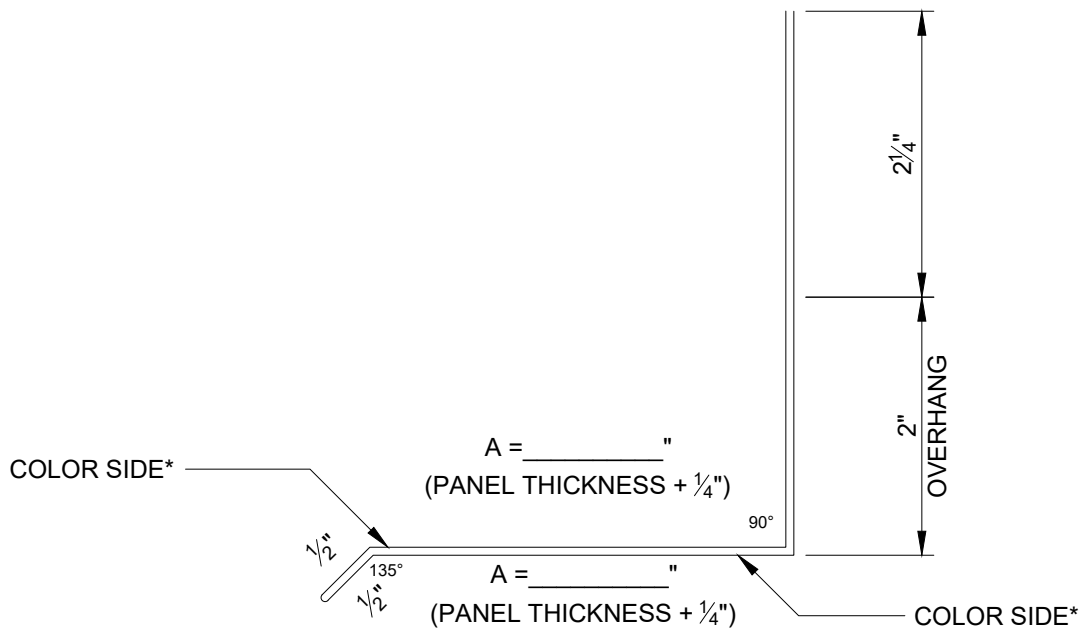

TRIM DIMENSION

| PANEL THICKNESS | DIM. "A" | STRETCH OUT |
|-----------------|----------|-------------|
| 2"              | 2 1/4"   | 13 1/2"     |
| 2 1/2"          | 2 3/4"   | 14 1/2"     |
| 3"              | 3 1/4"   | 15 1/2"     |
| 4"              | 4 1/4"   | 17 1/2"     |
| 5"              | 5 1/4"   | 19 1/2"     |
| 6"              | 6 1/4"   | 21 1/2"     |
| 8"              | 8 1/4"   | 25 1/2"     |

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-BS-05-KSH

CI-BS-CMU-04-KSH

\*TRIM IS DOUBLED OVER FOR COLOR BOTH SIDES

REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

BASE FLASHING

DETAIL #: CI-BF-03-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

www.kingspanpanels.com



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 3

QUANTITY REQUIRED:


LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

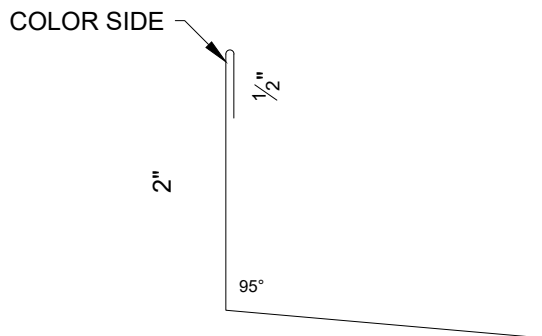

A = \_\_\_\_\_"  
(PANEL THICKNESS - 1/4")  
(ACTUAL DIMENSION MUST BE VERIFIED)

TRIM DIMENSION

| PANEL THICKNESS | DIM. "A" | STRETCH OUT |
|-----------------|----------|-------------|
| 2"              | 1 3/4"   | 4 1/4"      |
| 2 1/2"          | 2 1/4"   | 4 3/4"      |
| 3"              | 2 3/4"   | 5 1/4"      |
| 4"              | 3 3/4"   | 6 1/4"      |
| 5"              | 4 3/4"   | 7 1/4"      |
| 6"              | 5 3/4"   | 8 1/4"      |
| 8"              | 7 3/4"   | 10 1/4"     |

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:  
CI-WR-01-KSH

REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

BASE TRIM

DETAIL #: CI-BT-01-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

www.kingspanpanels.com



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH: 0'-3 $\frac{1}{4}$ " (3.25")

QUANTITY OF BREAKS: 3

QUANTITY REQUIRED:


LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

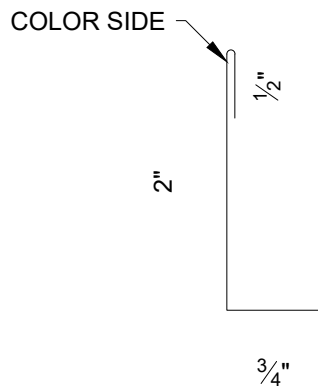

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-BS-01-KSH    CI-FO-01-KSH  
CI-WR-02-KSH    CI-VJ-13-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

BASE TRIM

DETAIL #: CI-BT-02-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 2

QUANTITY REQUIRED:


LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

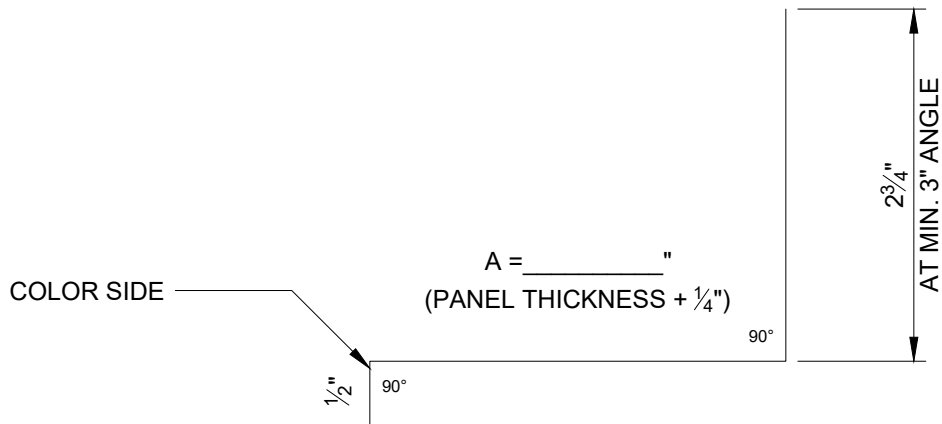

| TRIM DIMENSION  |          |             |
|-----------------|----------|-------------|
| PANEL THICKNESS | DIM. "A" | STRETCH OUT |
| 2"              | 2 1/4"   | 5 1/2"      |
| 2 1/2"          | 2 3/4"   | 6"          |
| 3"              | 3 1/4"   | 6 1/2"      |
| 4"              | 4 1/4"   | 7 1/2"      |
| 5"              | 5 1/4"   | 8 1/2"      |
| 6"              | 6 1/4"   | 9 1/2"      |
| 8"              | 8 1/4"   | 11 1/2"     |

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:  
CI-WR-02-KSH

\*\*IF PAINTED PLEASE SPECIFY WHICH SIDE\*\*

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 3          | 9/18/26 |

STACK FLASHING

DETAIL #: CI-SF-01-KSH-TRIMS  
RELEASE: 2026  
REGION: NORTH AMERICA  
www.kingspanpanels.com



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:


LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

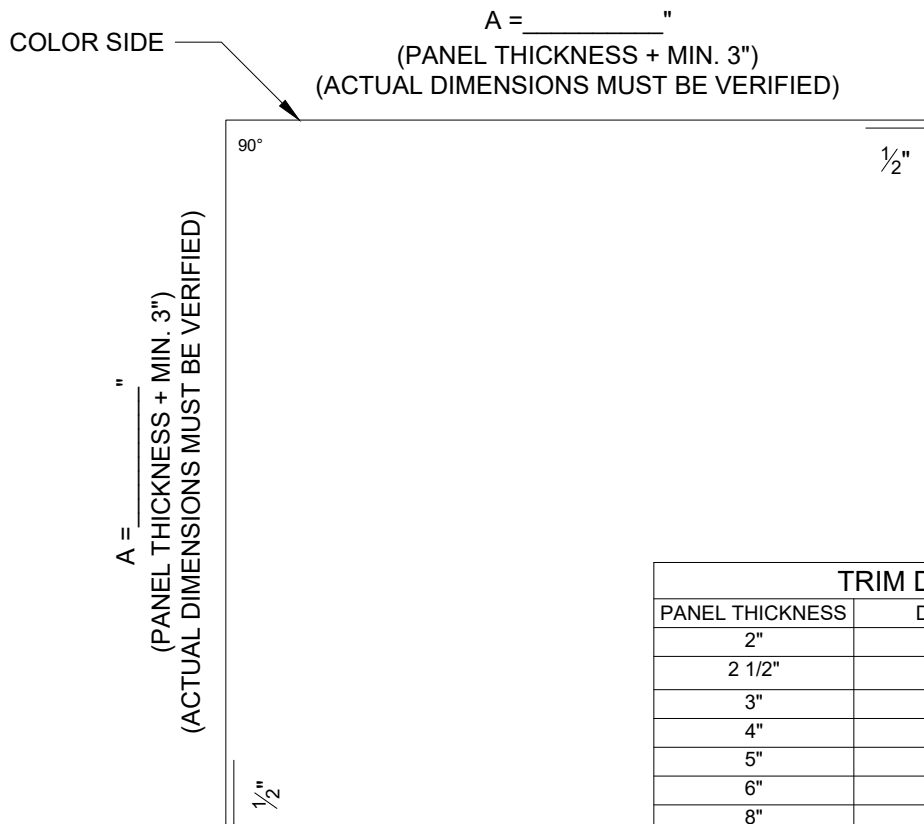

| TRIM DIMENSION  |          |             |
|-----------------|----------|-------------|
| PANEL THICKNESS | DIM. "A" | STRETCH OUT |
| 2"              | 5"       | 11"         |
| 2 1/2"          | 5 1/2"   | 12"         |
| 3"              | 6"       | 13"         |
| 4"              | 7"       | 15"         |
| 5"              | 8"       | 17"         |
| 6"              | 9"       | 19"         |
| 8"              | 11"      | 23"         |

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-OC-01-KSH    CI-OC-03-KSH    CI-IC-01-KSH    CI-IC-02-KSH  
CI-IC-03-KSH    CI-IC-04-KSH    CI-OC-CMU-01-KSH    CI-OC-CMU-03-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

OUTSIDE CORNER TRIM

DETAIL #: CI-OC-01-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

www.kingspanpanels.com



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH: 0'-7" (7.00")

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:


LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

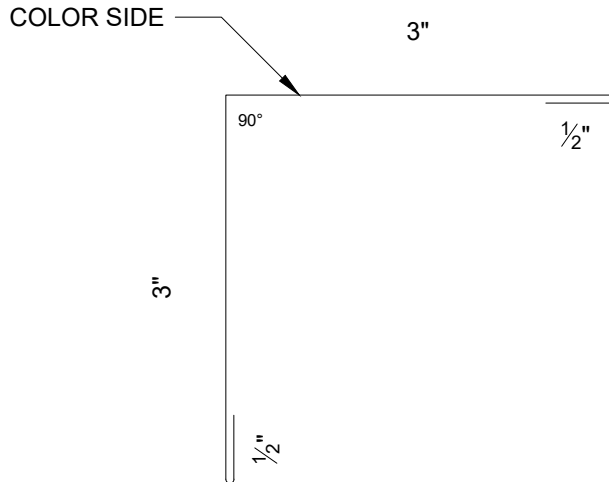

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-OC-01-KSH

CI-OC-CMU-01-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

OUTSIDE CORNER TRIM

DETAIL #: CI-OC-02-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:

LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)


GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

NOTE: THIS IS A CUSTOM TRIM W/ DIMENSIONS  
DEPENDANT UPON MATERIALS SUPPLIED BY OTHERS  
(NOT BY KINGSPAN)  
TRIM DIMENSIONS MUST BE BY CUSTOMER

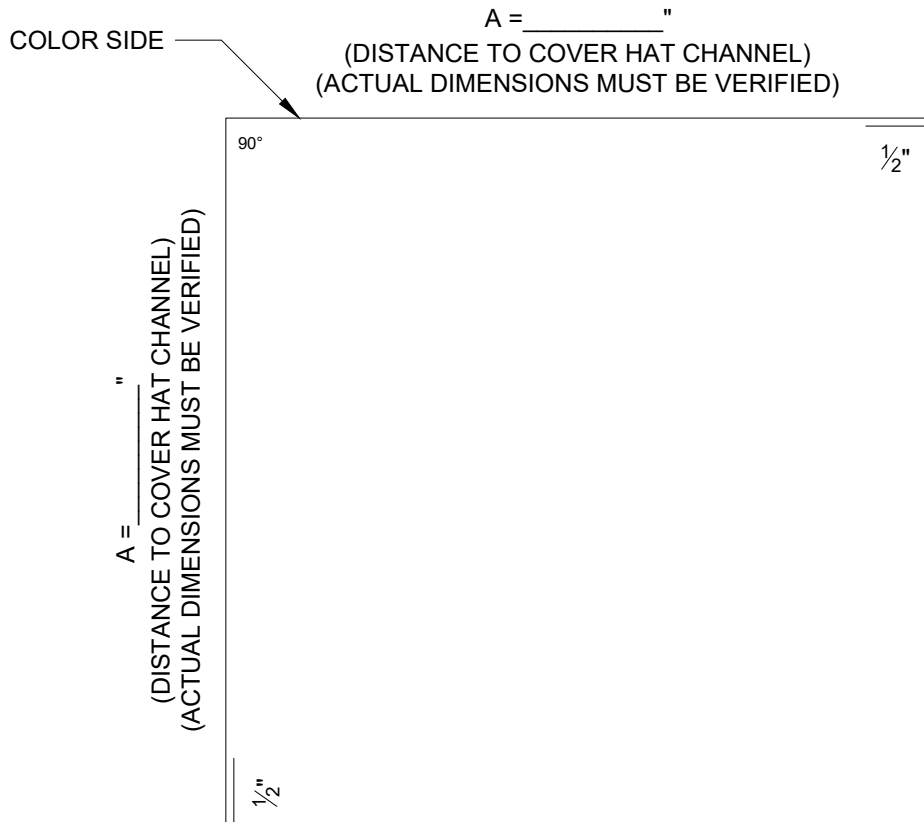

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS.  
ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST.  
THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

|                  |                  |                  |
|------------------|------------------|------------------|
| CI-IC-CMU-01-KSH | CI-OC-CMU-02-KSH | CI-OC-CMU-03-KSH |
| CI-OC-CMU-04-KSH | CI-IC-01-KSH     | CI-IC-02-KSH     |
| CI-IC-03-KSH     | CI-IC-04-KSH     | CI-IC-CMU-01-KSH |
| CI-IC-CMU-02-KSH | CI-IC-CMU-03-KSH | CI-IC-CMU-04-KSH |

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

OUTSIDE CORNER TRIM

DETAIL #: CI-OC-03-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH: 0'-7" (7.00")

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:


LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

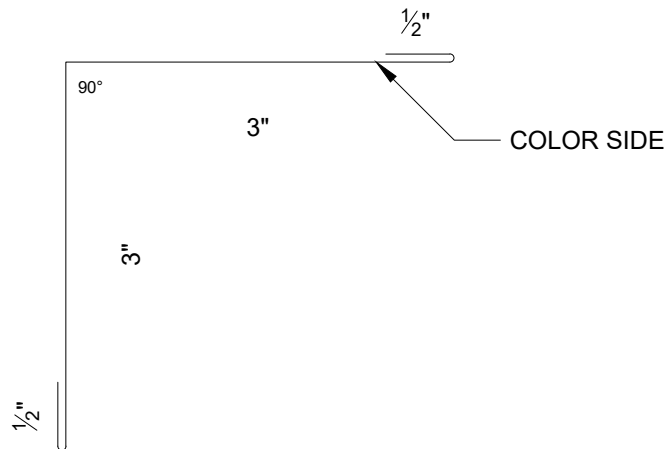

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-OC-01-KSH CI-OC-02-KSH CI-OC-03-KSH  
CI-IC-01-KSH CI-IC-CMU-01-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

INSIDE CORNER TRIM

DETAIL #: CI-IC-01-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:

LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)


GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

NOTE: THIS IS A CUSTOM TRIM W/ DIMENSIONS  
DEPENDANT UPON MATERIALS SUPPLIED BY OTHERS  
(NOT BY KINGSPAN)  
TRIM DIMENSIONS MUST BE BY CUSTOMER

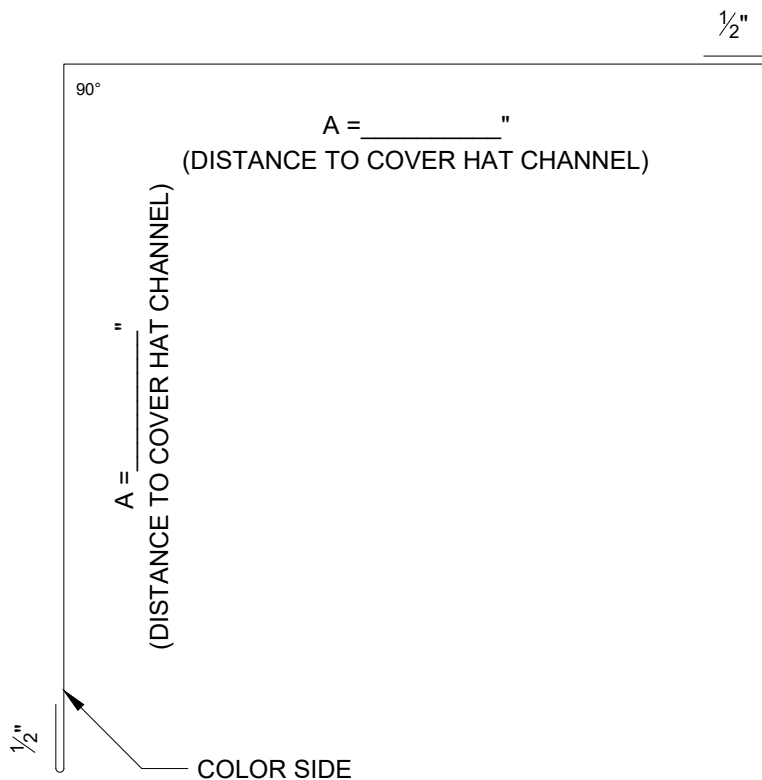

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS.  
ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST.  
THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-OC-CMU-01-KSH    CI-OC-CMU-02-KSH  
CI-OC-CMU-03-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

INSIDE CORNER TRIM

DETAIL #: CI-IC-02-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 6

QUANTITY REQUIRED:


LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

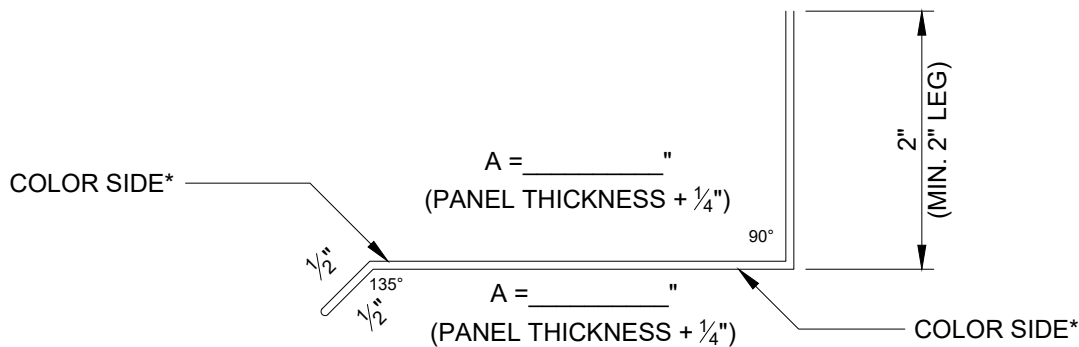

| TRIM DIMENSION  |          |             |
|-----------------|----------|-------------|
| PANEL THICKNESS | DIM. "A" | STRETCH OUT |
| 2"              | 2 1/4"   | 9 1/2"      |
| 2 1/2"          | 2 3/4"   | 10 1/2"     |
| 3"              | 3 1/4"   | 11 1/2"     |
| 4"              | 4 1/4"   | 13 1/2"     |
| 5"              | 5 1/4"   | 15 1/2"     |
| 6"              | 6 1/4"   | 17 1/2"     |
| 8"              | 8 1/4"   | 21 1/2"     |

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-FO-01-KSH

\*TRIM IS DOUBLED OVER FOR COLOR BOTH SIDES

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

DRIP FLASHING

DETAIL #: CI-DF-01-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

www.kingspanpanels.com



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 4

QUANTITY REQUIRED:


LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

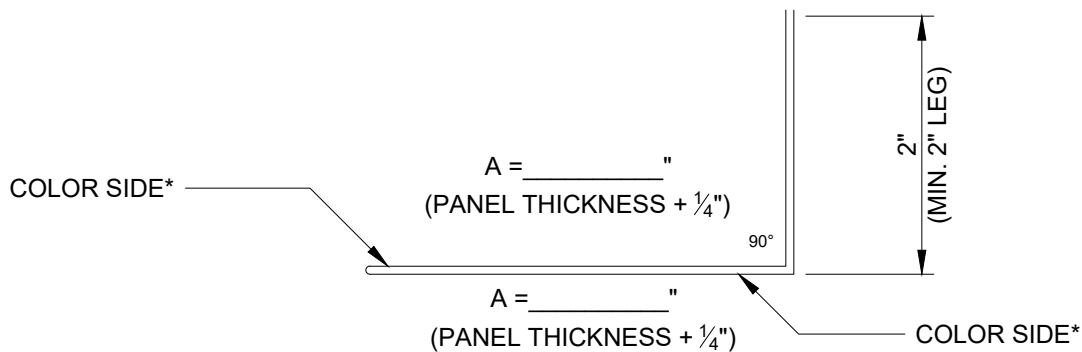

| TRIM DIMENSION  |          |             |
|-----------------|----------|-------------|
| PANEL THICKNESS | DIM. "A" | STRETCH OUT |
| 2"              | 2 1/4"   | 8 1/2"      |
| 2 1/2"          | 2 3/4"   | 9 1/2"      |
| 3"              | 3 1/4"   | 10 1/2"     |
| 4"              | 4 1/4"   | 12 1/2"     |
| 5"              | 5 1/4"   | 14 1/2"     |
| 6"              | 6 1/4"   | 16 1/2"     |
| 8"              | 8 1/4"   | 20 1/2"     |

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-VJ-08-KSH

CI-VJ-17-KSH

\*TRIM IS DOUBLED OVER FOR COLOR BOTH SIDES

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

DRIP FLASHING

DETAIL #: CI-DF-02-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

www.kingspanpanels.com



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:

LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:



| TRIM DIMENSION  |          |             |
|-----------------|----------|-------------|
| PANEL THICKNESS | DIM. "A" | STRETCH OUT |
| 2"              | 1 3/4"   | 4 3/4"      |
| 2 1/2"          | 2 1/4"   | 5 1/4"      |
| 3"              | 2 3/4"   | 5 3/4"      |
| 4"              | 3 3/4"   | 6 3/4"      |
| 5"              | 4 3/4"   | 7 3/4"      |
| 6"              | 5 3/4"   | 8 3/4"      |
| 8"              | 7 3/4"   | 10 3/4"     |

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

|              |              |              |              |
|--------------|--------------|--------------|--------------|
| CI-EW-01-KSH | CI-FO-02-KSH | CI-FO-04-KSH | CI-FO-05-KSH |
| CI-FO-07-KSH | CI-FO-08-KSH | CI-FO-08-KSH | CI-PR-01-KSH |
| CI-PR-02-KSH | CI-PR-03-KSH | CI-PR-04-KSH | CI-PR-05-KSH |
| CI-PR-06-KSH | CI-WR-02-KSH | CI-SO-03-KSH | CI-SO-04-KSH |
| CI-EV-01-KSH | CI-EV-02-KSH | CI-EV-03-KSH | CI-EV-04-KSH |

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 3          | 9/18/26 |

CAP TRIM

DETAIL #: CI-CT-01-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

www.kingspanpanels.com



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 4

QUANTITY REQUIRED:

LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

NOTE: THIS IS A CUSTOM TRIM W/ DIMENSIONS  
DEPENDANT UPON MATERIALS SUPPLIED BY OTHERS  
(NOT BY KINGSPAN)  
TRIM DIMENSIONS MUST BE BY CUSTOMER

A = \_\_\_\_\_"  
(AS REQ'D FOR  
FRAMING - MIN. 2")



B = \_\_\_\_\_"  
(FRAMING + 1/4")

COLOR SIDE

A = \_\_\_\_\_"  
(AS REQ'D FOR  
FRAMING - MIN. 2")

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS.  
ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST.  
THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:  
CI-FO-13-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

CHANNEL TRIM

DETAIL #: CI-CT-02-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

www.kingspanpanels.com



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 4

QUANTITY REQUIRED:

LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)


GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

NOTE: THIS IS A CUSTOM TRIM W/ DIMENSIONS  
DEPENDANT UPON MATERIALS SUPPLIED BY OTHERS  
(NOT BY KINGSPAN)  
TRIM DIMENSIONS MUST BE BY CUSTOMER

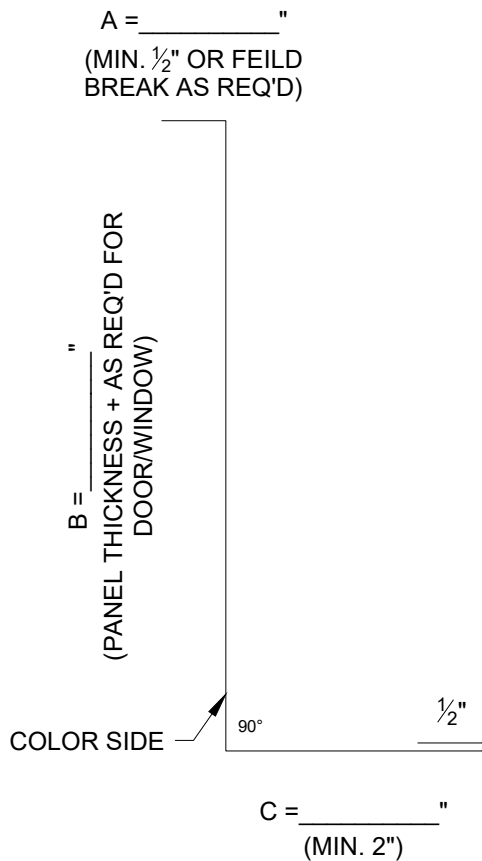

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS.  
ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST.  
THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:  
CI-FO-04-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

JAMB TRIM

DETAIL #: CI-JT-01-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 5

QUANTITY REQUIRED:

LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)


GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

NOTE: THIS IS A CUSTOM TRIM W/ DIMENSIONS  
DEPENDANT UPON MATERIALS SUPPLIED BY OTHERS  
(NOT BY KINGSPAN)  
TRIM DIMENSIONS MUST BE BY CUSTOMER

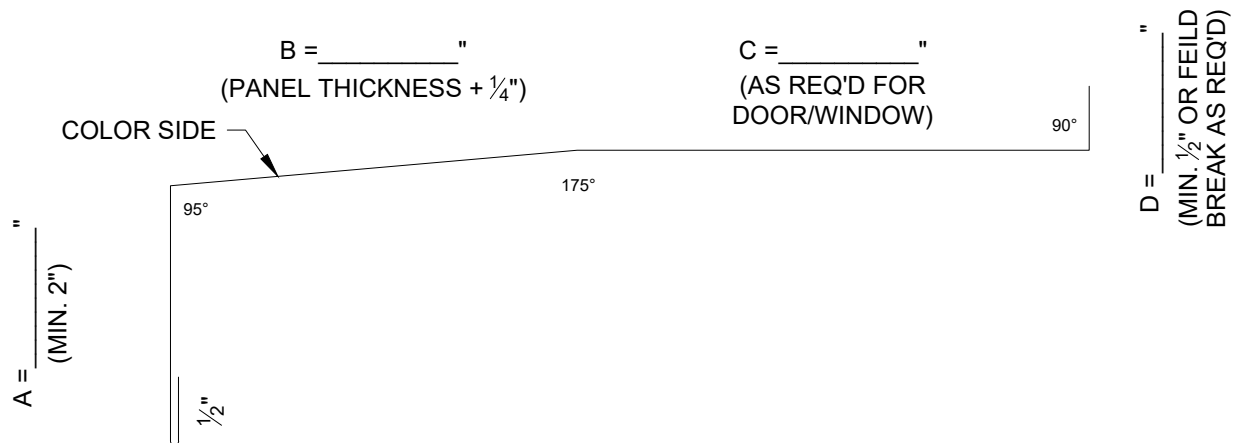

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS.  
ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST.  
THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:  
CI-FO-07-KSH

| REVISION   |         |
|------------|---------|
| REVISION # | DATE    |
| 3          | 9/18/26 |

SILL TRIM

DETAIL #: CI-SL-01-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 8

QUANTITY REQUIRED:

LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)


GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

NOTE: THIS IS A CUSTOM TRIM W/ DIMENSIONS  
DEPENDANT UPON MATERIALS SUPPLIED BY OTHERS  
(NOT BY KINGSPAN)  
TRIM DIMENSIONS MUST BE BY CUSTOMER

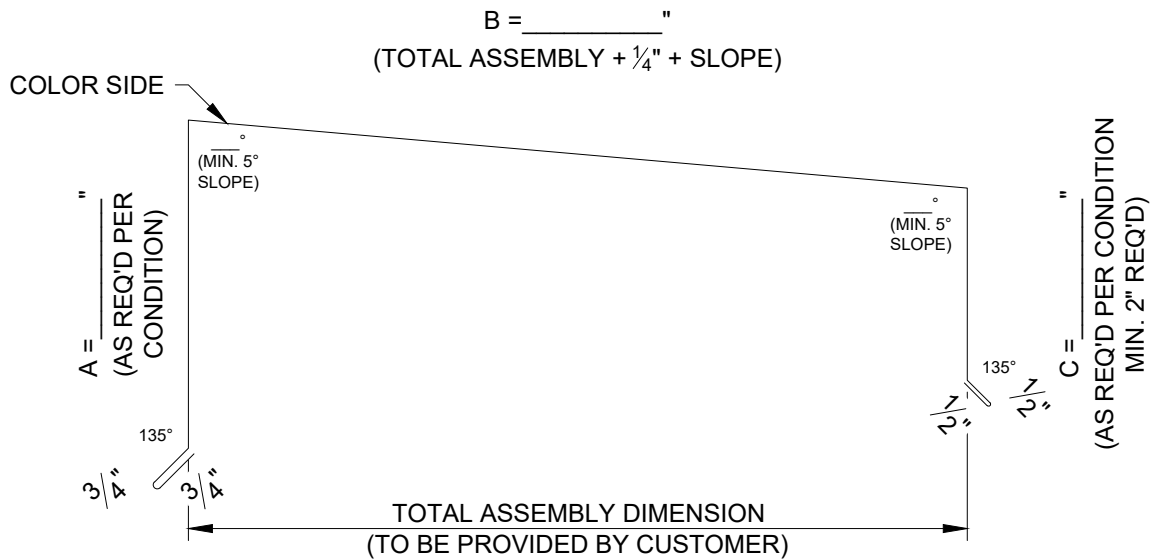

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS.  
ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST.  
THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-PR-01-KSH

CI-PR-04-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

PARAPET CAP TRIM

DETAIL #: CI-PT-01-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 2

QUANTITY REQUIRED:

LENGTH: 0'-8" (8.00")


GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

NOTE: THIS IS A CUSTOM TRIM W/ DIMENSIONS  
DEPENDANT UPON MATERIALS SUPPLIED BY OTHERS  
(NOT BY KINGSPAN)  
TRIM DIMENSIONS MUST BE BY CUSTOMER

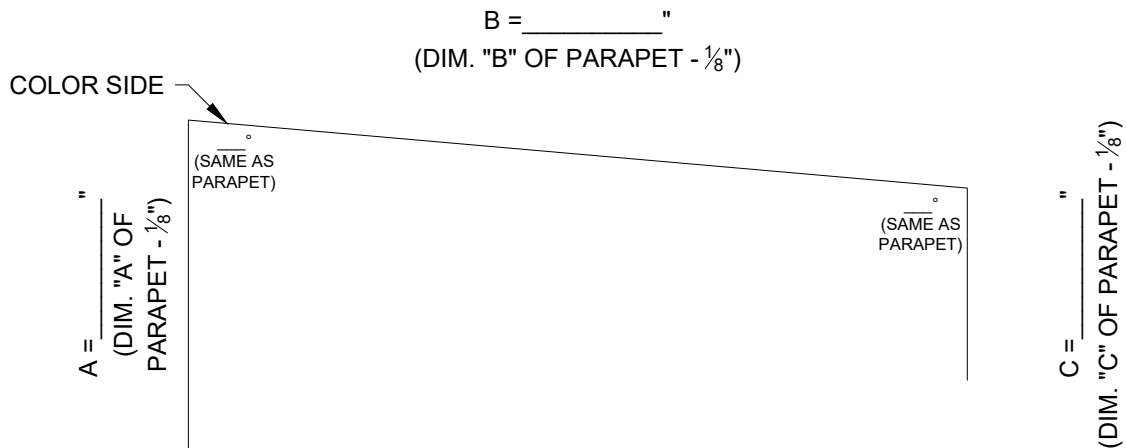

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS.  
ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST.  
THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-PR-01-KSH

CI-PR-04-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

PARAPET LAP STRIP

DETAIL #: CI-PT-02-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 9

QUANTITY REQUIRED:

LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)


GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

NOTE: THIS IS A CUSTOM TRIM W/ DIMENSIONS  
DEPENDANT UPON MATERIALS SUPPLIED BY OTHERS  
(NOT BY KINGSPAN)  
TRIM DIMENSIONS MUST BE BY CUSTOMER

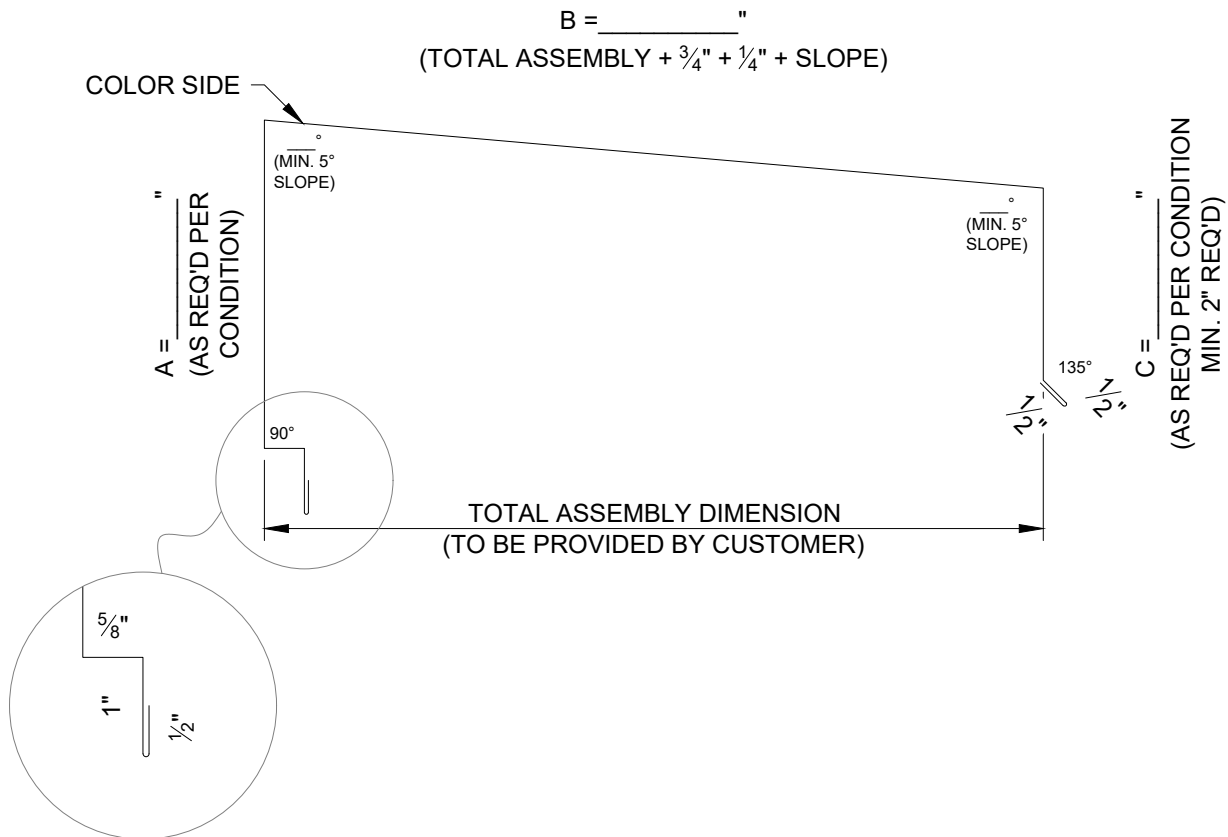

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS.  
ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST.  
THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-PR-02-KSH

CI-PR-05-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

PARAPET LAP STRIP

DETAIL #: CI-PT-03-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 3

QUANTITY REQUIRED:

LENGTH: 0'-8" (8.00")


GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

NOTE: THIS IS A CUSTOM TRIM W/ DIMENSIONS  
DEPENDANT UPON MATERIALS SUPPLIED BY OTHERS  
(NOT BY KINGSPAN)  
TRIM DIMENSIONS MUST BE BY CUSTOMER

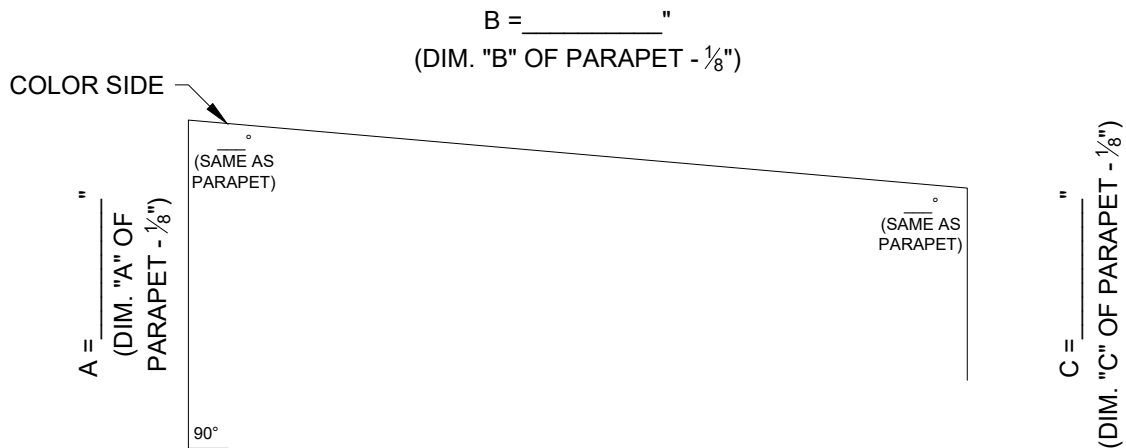

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS.  
ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST.  
THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-PR-02-KSH

CI-PR-05-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

PARAPET LAP STRIP

DETAIL #: CI-PT-04-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 1

QUANTITY REQUIRED:

LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)


GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

NOTE: CLEAT GAUGE SHOULD BE  
REVIEWED BY KINGSPAN ENGINEERING  
BASED ON PARAPET TRIM DESIGN



TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS.  
ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST.  
THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-PR-01-KSH

CI-PR-04-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

CLEAT TRIM

DETAIL #: CI-CL-01-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 8

QUANTITY REQUIRED:


LENGTH: 10'-3" (123") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

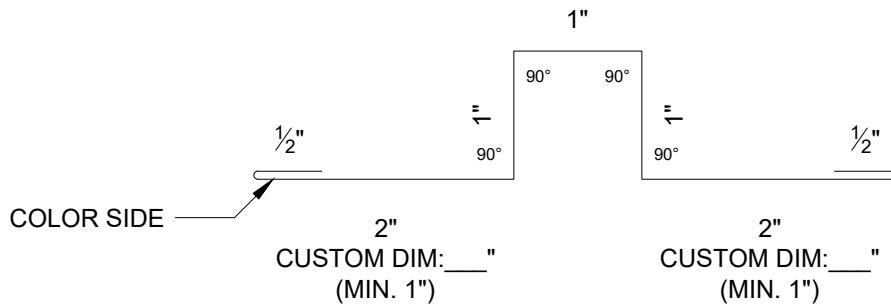

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS: CI-VJ-01-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

HAT TRIM

DETAIL #: CI-HT-01-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

www.kingspanpanels.com



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 8

QUANTITY REQUIRED:


LENGTH: 10'-3" (123") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

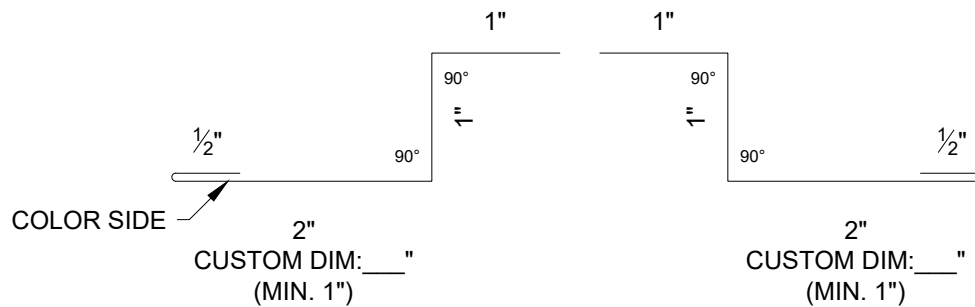

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS. ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST. THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS: CI-VJ-03-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

2-PC HAT TRIM

DETAIL #: CI-HT-02-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)



# KS SERIES\_KINGSPAN BREAK FORM TRIMS

TRIM GIRTH:

QUANTITY OF BREAKS: 4

QUANTITY REQUIRED:


LENGTH: 10'-0" (120") (TO BE FIELD CUT AS REQUIRED)

GAUGE: ☐ 26GA ☐ 24GA ☐ 22GA

COLOR:

EMBOSSMENT: ☐ STUCCO EMBOSSED ☐ AZTECO EMBOSSED ☐ SMOOTH

FINISH: ☐ STANDARD KYNAR ☐ MP/SMP ☐ OTHER:

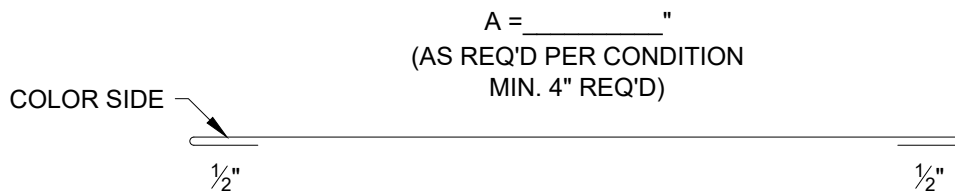

TRIM PROFILES AND DIMENSIONS ARE BASED UPON THE PUBLISHED KINGSPAN CONSTRUCTION DETAILS.  
ALL DIMENSIONS REQUIRE VERIFICATION. CUSTOM PROFILES AVAILABLE UPON REQUEST.  
THE ABOVE TRIM COMPONENT IS BASED UPON THE FOLLOWING KINGSPAN DETAILS:

CI-VJ-01-KSH CI-VJ-03-KSH CI-VJ-04-KSH CI-VJ-06-KSH CI-VJ-07-KSH  
CI-VJ-08-KSH CI-VJ-13-KSH CI-VJ-17-KSH CI-VJ-22-KSH

## REVISION

| REVISION # | DATE    |
|------------|---------|
| 3          | 9/18/26 |

MENDING PLATE

DETAIL #: CI-MP-01-KSH-TRIMS

RELEASE: 2026

REGION: NORTH AMERICA

[www.kingspanpanels.com](http://www.kingspanpanels.com)

